

AD-A066 895

TRACOR INC SAN DIEGO CA SAN DIEGO LAB  
BACKGROUND STATIONARITY OF HIGH RESOLUTION SONAR SYSTEMS.(U)  
MAR 68 D M HORTON  
TRACOR-SD-68-006-C


F/G 17/1

N1231953154996A

UNCLASSIFIED

NL

1 OF 1  
AD A  
066895



END  
DATE  
FILMED

6-79  
DDC

K2175

Contract No. N123(953)54996A  
TRACOR Project No. 002-009-26  
Document No. SD-68-006-C

UNCLASSIFIED  
CONFIDENTIAL

Copy # 3

MON 11 MAR 1968

LEVEL II

CONFIDENTIAL LIBRARY COPY

MOST Project-3

1

SC

Good q

AD A0 66895

DDC FILE COPY

# TECHNICAL NOTE

## BACKGROUND STATIONARITY OF HIGH RESOLUTION SONAR SYSTEMS (U)

Submitted to

U. S. Naval Undersea Warfare Center  
San Diego, California 92152

Attention: Code D551

8 March 1968

DDC  
RECEIVED  
APR 4 1979  
F

### DISTRIBUTION STATEMENT A

Approved for public release;  
Distribution Unlimited

SCIENCES AND SYSTEMS DIVISION • SAN DIEGO LABORATORY

3065 Rosecrans Place, San Diego, California 92110, AG 714/222-6692  
Home Office: TRACOR Inc., 6400 Tracor Lane, Austin, Texas 78721, AC 512-926-2800

TRACOR

This document contains information affecting the national defense of the United States, within the meaning of the espionage laws, Title 18, U.S.C., Sections 793 and 794, the transmission or revelation of its contents in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED  
CONFIDENTIAL

GROUP 2  
DOWNGRADED AT 3 YEAR INTERVALS:  
DECLASSIFIED AFTER 12 YEARS.

UNCLASSIFIED  
~~CONFIDENTIAL~~

Copy #3.



3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

Contract No. N123(953)54996A  
TRACOR Project No. 002-009-26  
Document No. SD-68-006-C

(14) TRACOR

(9) TECHNICAL NOTE

(6) BACKGROUND STATIONARITY OF  
HIGH RESOLUTION SONAR SYSTEMS. (U)

Submitted to  
U. S. Naval Undersea Warfare Center  
San Diego, California 92152

ATTENTION: Code D551

(11) 8 March 1968

ACCESSION BY	
NTIS	White Section <input checked="" type="checkbox"/>
DOC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	<input type="checkbox"/>
BY: <i>Letter on file</i>	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. or SPECIAL
A	

Approved:

D.V. Holliday  
D. V. Holliday  
Project Director

Prepared by:

(10) D.M. Horton  
David M. Horton  
Asst. Project Director

"This document contains information affecting the national defense of the United States, within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law."

411 120  
UNCLASSIFIED  
~~CONFIDENTIAL~~

GROUP - 4  
DOWNGRADED AT 3 YEAR INTERVALS  
DECLASSIFIED AFTER 12 YEARS.





3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

## ABSTRACT

✓ This report describes the theory, the applied technique and the results of the study of background stationarity when using large time-bandwidth product sonar transmissions. Stationarity is defined in the theory to mean the RMS background level is invariant with time. Graphical representation of the results indicate that the data does have a Rayleigh distribution thereby confirming the stationarity. ↗

**CONFIDENTIAL**



3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

**BACKGROUND STATIONARITY OF HIGH RESOLUTION  
SONAR SYSTEMS**

(C) Background stationarity is a necessary requirement for the proper and accurate operational analysis of a sonar data correlator processor. If the background is non-stationary, the false alarm rate is raised proportionally. Non-stationarity implies that the RMS background level is time variant or the presence of discrete reverberant scatterers are resolvable in the processor, causing a departure from the expected "background only" case. The availability of high resolution sonar system data necessitated the development of a technique to examine the background statistics to determine the background stationarity.

(U) Assuming that a particular interval of processor output is stationary, then its distribution should be given by the definition of a Rayleigh distribution.

$$p(x) = \frac{x \exp\left(-\frac{x^2}{2\sigma^2}\right)}{\sigma^2}, \quad x \geq 0$$

Where  $\sigma$  is the standard deviation of the distribution.

**CONFIDENTIAL**



UNCLASSIFIED



3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

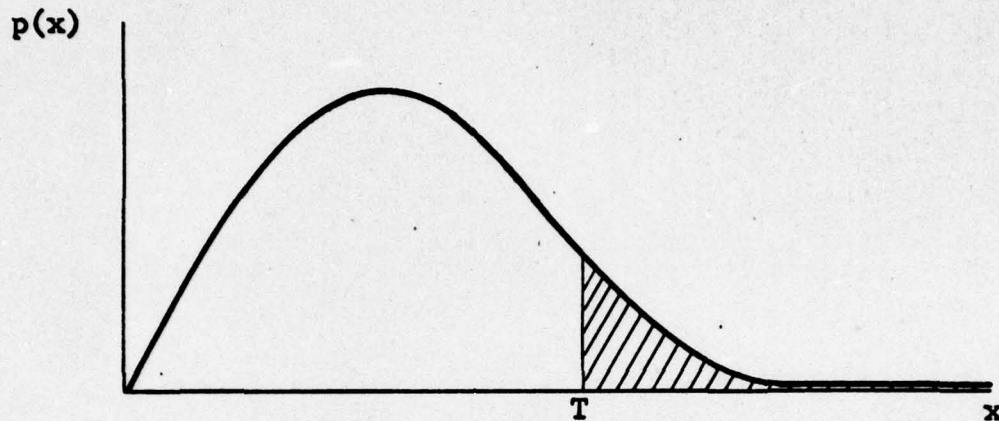


FIGURE B-1. RAYLEIGH DISTRIBUTION CURVE

(U) By selecting a threshold level (T) the fraction of the total number of data points equal to or greater than T are approximately equal to the area of the shaded portion of Figure B-1. Since the total area under the curve is equal to one, the area of the shaded portion is given by:

$$\begin{aligned} \text{Area} &= 1 - \int_0^T \frac{x}{\sigma^2} \exp\left(-\frac{x^2}{2\sigma^2}\right) dx = \\ &= 1 - \left(1 - \exp\left(-\frac{T^2}{2\sigma^2}\right)\right) = \exp\left(-\frac{T^2}{2\sigma^2}\right) \end{aligned}$$

UNCLASSIFIED

# CONFIDENTIAL



3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

(U) By proper selection of threshold levels from 0 to approximately  $3\sigma$ , plotting the value for the logarithm of the area under the curve versus  $T^2$  on a linear scale will result in a straight line. The physical interpretation of this method as applied to the data follows.

(U) The threshold level is allowed to take equal increments of magnitude from 0 to the peak amplitude obtained from the correlator. If the number of points greater than T or equal to T is n and N is the total number of points in the interval under investigation, then the area under the curve is approximately equal to  $\ln(n/N)$ . Figures B-2 and B-3 illustrate the results of one such investigation.

(C) The correlator processor used in this instance was a 12 bit clipped reference quadrature correlator. The data was from an echo ranging sonar system having a 1000 Hz bandwidth LFM transmitted signal operating in the bottom bounce mode at a  $40^\circ$  depression angle. Several segments of the bottom reverberation from different pings in the same run were analyzed in this manner with the results substantially the same as that shown.

(C) Analysis of a limited number of segments of bottom reverberation from Station MIKE indicate no measurable change of quadrature correlator output statistics from the expected Rayleigh form. The linearity of the curve is maintained past the  $3\sigma$  value. Departure from linearity in the  $4\sigma$  to  $5\sigma$  region can be easily explained by the number of samples treated at those amplitudes.



UNCLASSIFIED



3065 ROSECRANS PLACE, SAN DIEGO, CALIFORNIA 92110

(U) For purposes of comparison, Figure B-3 illustrates a section of reverberation containing a signal. Note the change in the scale of the abscissa.

UNCLASSIFIED



CONFIDENTIAL

BANDWIDTH: 1000 Hz  
 DURATION: 1 Second  
 DEPRESSION ANGLE: 40°  
 BOTTOM REVERBERATION

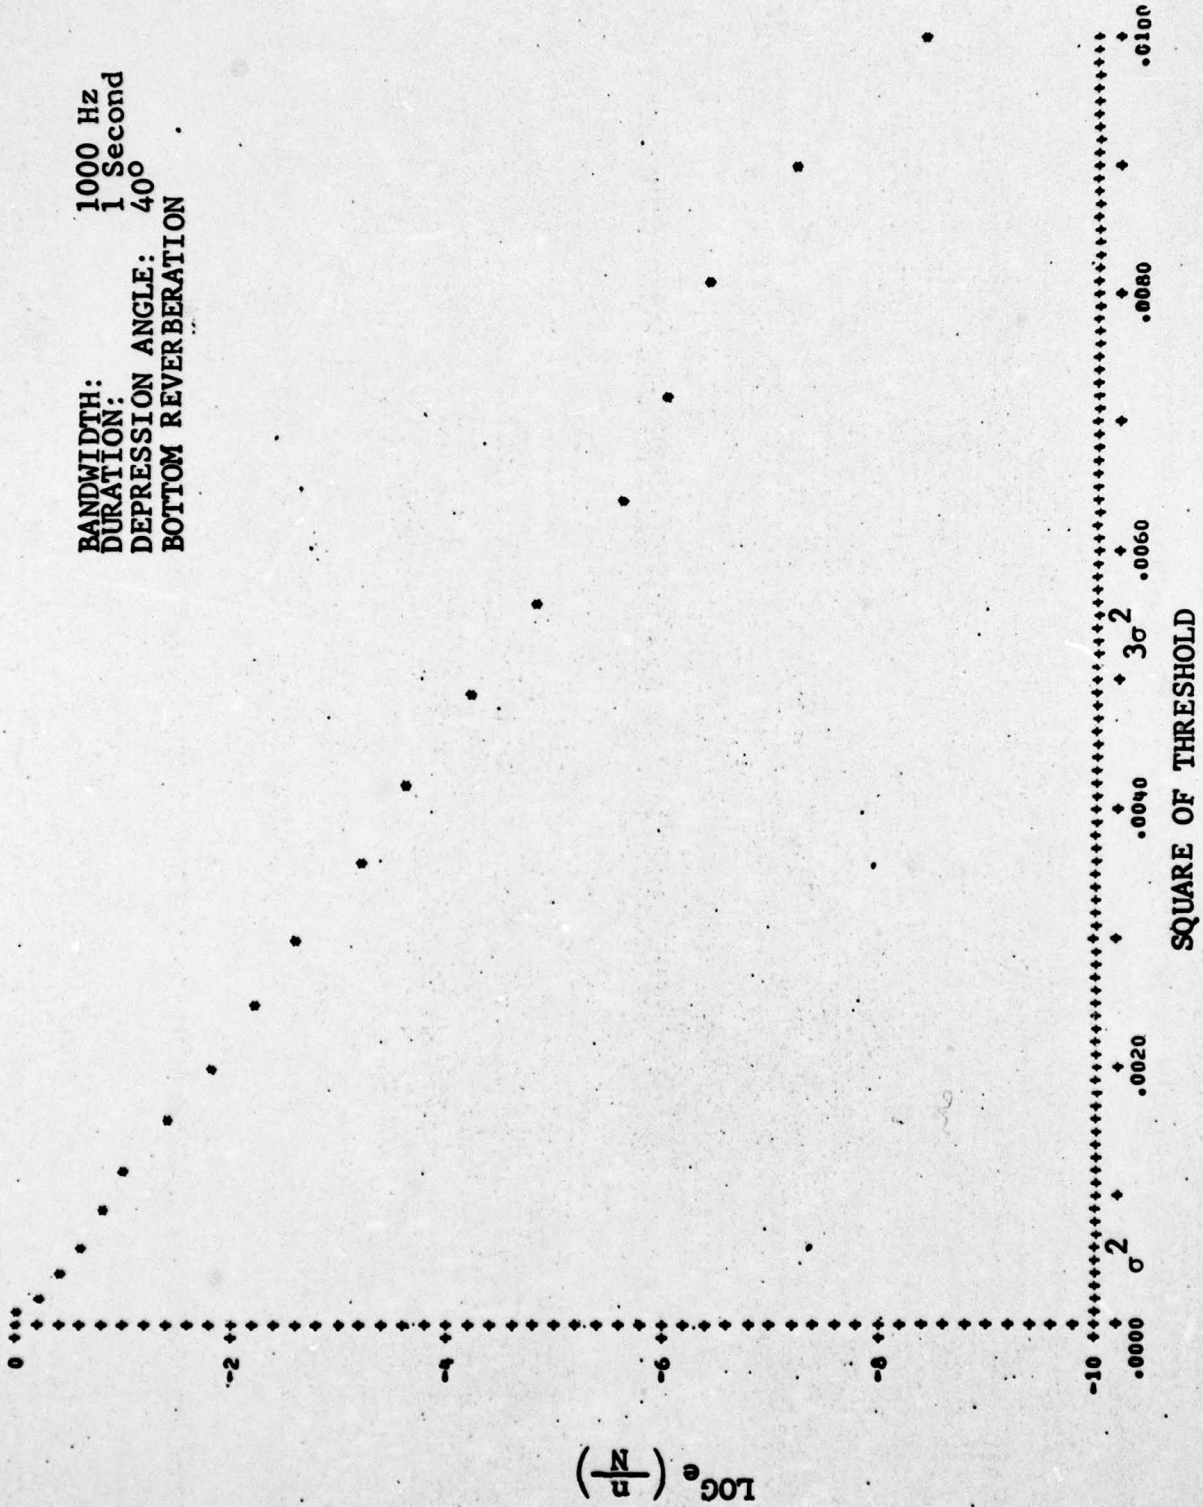


Figure B-2  
 CUMULATIVE PROBABILITY OF EXCEEDING THE THRESHOLD (NO SIGNAL)

CONFIDENTIAL

UNCLASSIFIED  
CONFIDENTIAL

BANDWIDTH: 1000 Hz  
DURATION: 1 Second  
DEPRESSION ANGLE: 40°  
BOTTOM REVERBERATION

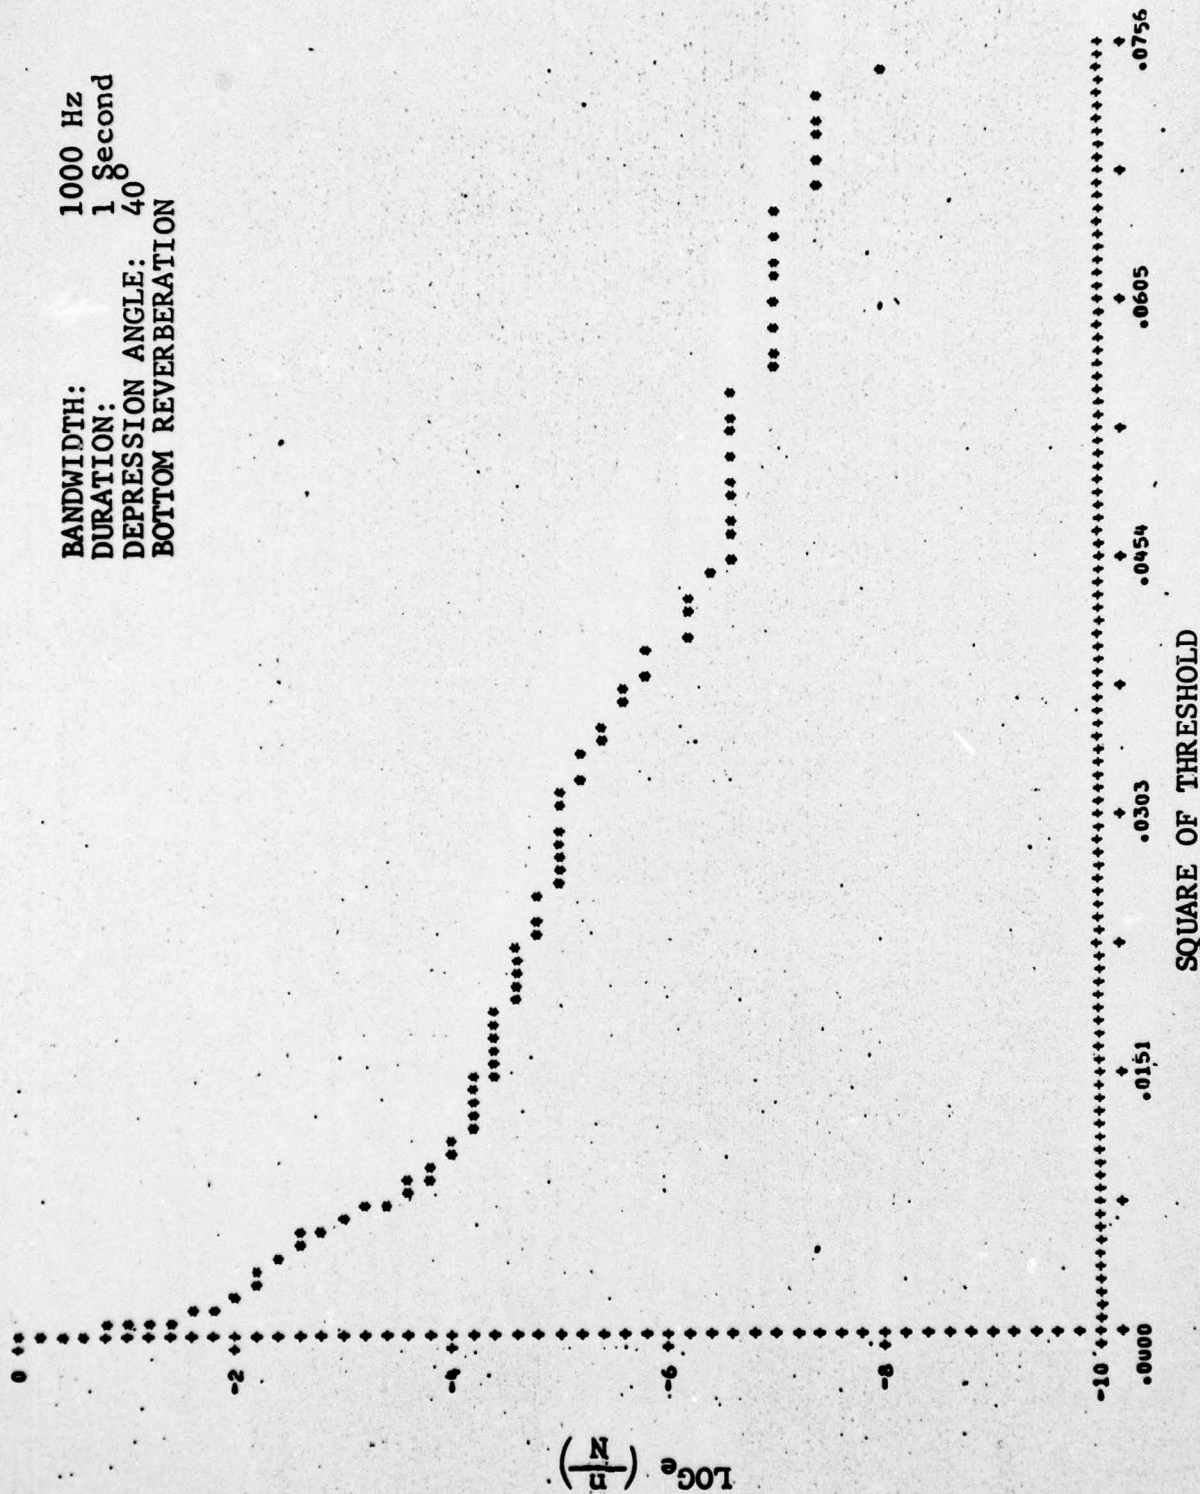


Figure B-3  
CUMULATIVE PROBABILITY OF EXCEEDING THE THRESHOLD (SIGNAL PRESENT)

UNCLASSIFIED  
CONFIDENTIAL